

EXTERIOR

**Building
Construction
Trades**

DEWALT
DRIVEN

SITE SOLUTIONS

Powers
ENGINEERED

DELIVERING INTERIOR & EXTERIOR TRADE SITE SOLUTIONS
Product Range & Applications

Contact us

P: 1800 338 002 E: info@sbdinc.com.au www.dewalt.com.au www.powers-guide.com



OUR DNA

From our very beginnings over a century ago, we have been involved in large multidisciplinary construction, industrial, automotive and infrastructure projects all over the world. Our brands have contributed to the completion of some of the largest projects in Australia and New Zealand providing innovative, cost-focused tool, storage and fastening solutions.

DEWALT

SIDCHROME

STANLEY

POWERS

BOSTITCH



TOTAL SOLUTIONS

STANLEY BLACK & DECKER is committed to adding value to projects ... offering our experience and understanding of tools and fastening systems.

Our global reach allows us to offer best-practice advice and solutions for your project. On each project our SITE SOLUTIONS Team will assist you from start to finish, providing support and ongoing service to contractors or designers a complete solution ... from tool to anchor.

We work closely on-site with our clients to develop a better understanding of their needs. Our team of engineering and end-user specialists have been selected for their proven capacity to respond to the demands of ever-changing industries.

We can provide ongoing support on

- Anchor design and specification
- Tool selection and advice
- Tool repair and maintenance service
- Engineering, field-testing, analysis and consultation
- Product training and certification
- Sales and site support
- Comprehensive ANZ distribution network

EXTERIOR / CARPENTRY / ROOFING

FRAMING NAILER

Page 13



FLEXVOLT CIRCULAR SAW

Page 16




IMPACT DRIVER

Page 11



HEX-HEAD TAPPER



BLUE-TIP SCREWBOLT Galvanised

Page 29



BLUE-TIP SCREWBOLT Zinc

Page 29



**AC100-PRO
Vinylester**

Page 27



**PV45-PRO
Polyester**

Page 27



FLEXVOLT MITRE SAW

Page 17



FLEXVOLT TABLE SAW

Page 17




**SDS+
ROTARY HAMMER**

Page 16



VERTIGO



FRAMING NAILER

Page 13



FINISHING NAILER

Page 13



AC100-PRO Vynylester

Page 27



PV45-PRO Polyester

Page 27




PURE150-PRO Epoxy

Page 27



POWERS THROUGH BOLT

Page 29



BLUE-TIP SCREWBOLT Galvanised

Page 29



4KG HAMMER DRILL

Page 21



SDS+ XLR DRILL BIT

Page 22



MURO Collated Screw Gun




1/2" IMPACT WRENCH

Page 11




WOODPECKER Decking Screws



MURO Decking Tool



MURO Ejector Screws



Countersink PUP



METAL FRAME PLUG



Countersink SPIKE



EXTERIOR / BUILDING CONSTRUCTION

**TRAK-IT C5
GAS NAILER**

Page 30



**P3500EX
NAILER**

Page 31



**P3X
NAILER**

Page 31



BLUE-TIP SCREWBOLT Galvanised

Page 29



POWERS THROUGH BOLT

Page 29




PBI BRACE-IT ANCHOR

Page 29



**INSULATION
WASHER**



PMID INSULATION NAIL



**PURE110-PRO
Epoxy**

Page 27



**AC100-PRO
Vinylester**

Page 27



**PURE150-PRO
Epoxy**

Page 27



**PV45-PRO
Polyester**

Page 27



POWERS THROUGH BOLT

Page 29



Countersink PUP



IMPACT DRIVER

Page 11



SDS+ BRUSHLESS IMPACT HAMMER

Page 10



4KG HAMMER DRILL

Page 21



SDS+ XLR DRILL BIT

Page 22



BLUE-TIP SCREWBOLT Galvanised

Page 29



FLEXVOLT GRINDER

Page 16



6KG COMBI HAMMER DRILL

Page 21



1/2" HIGH-TORQUE IMPACT WRENCH

Page 11



SDS+ ROTARY HAMMER

Page 10



SDS+ BRUSHLESS ROTARY HAMMER

Page 10



ROTATING LASER - RED

Page 9



x3 360° LINE LASER

Page 9



EXTERIOR / BUILDING CONSTRUCTION



DEWALT

SIDCHROME

STANLEY

POWERS

BOSTITCH

Detailed performance data is available for all DEWALT and POWERS products

LASERS

LASER DISTANCE METER 50M | Product Code DW03050-XJ

- Laser Distance Measurer (LDM) manufactured to withstand the inevitable job site drops and falls on the Job site
- It has a range of up to 50m and an accuracy of +/- 1.5mm
- Common end-user functions : Linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.

Voltage	Lines	Type of Laser	Indoor Visibility	Accuracy	Weight
2 x 1.5V AAA	1	Class 2	50 M	+/- 1.5mm/m	0.15 kg



DW1080 LINE LASER 10.8V GREEN - ANZ | Product Code DCE089D1G-XE

- x3 360° Self-Leveling lines • Projects bright horizontal and vertical lines
- Variable blink sequence for manual mode • Working range: 30M (60M with detector)
- IP65 debris / water resistance • Locking pendulum helps prevent damage to internal components
- Includes blow-mould case, extended ceiling bracket, 10.8v battery, charger, target card, glasses

Voltage	Lines	Type of Laser	IP Rating	Accuracy	Weight
10.8V	x3 360°	Class 2	65	+/-3mm @ 10m	4.3 kg



SELF-LEVELLING 3-LINE LASER LEVEL KIT | Product Code DW089K-XE

- Accurate to 0.3mm/m in levelling applications • Self-levelling up to 4° surface angle with automatic out-of-level indication • 3-button operation and low-battery indication • Adjustment dial for fine line movement (vertical & side) • Built-in magnetic pivot bracket mounts easily on metal surfaces
- Includes 4 AA batteries for 30 hours of run-time • Ceiling mount • Kit box

Power Supply	Beams	Indoor Visibility Range	Type of Laser	Line Accuracy	Weight
4 x AA Batteries	3	15 M	Class 2	+/-0.3 mm/m	0.8 kg



ROTATING LASER - GREEN | Product Code DCE079D1G-XE

- The DEWALT® 18V MAX Green Beam Rotary Tough Laser allows users to use lasers in adverse conditions • IP67 debris / water resistance • 2 Meter Drop Rating • Highly visible green beam
- Scan Mode 15 / 45 / 90 degrees • Includes TSTAK compatible case, DCE079 Rotary Laser, detector, remote control, bracket adaptor, glasses, laser target, mounting bracket, 2.0Ah battery, charger
- Battery Life: 1.5Ah = 14hrs / 2Ah = 19hrs / 3Ah = 29hrs / 5Ah = 48hrs

Voltage	Beams	Type of Laser	IP Rating	Accuracy	Indoor Visibility	Weight
18V	3	Class 2	67	+/- 1.5mm @ 30m	76 - 600 M	0.7 kg



ROTATING LASER - RED | Product Code DCE074NR-XE

- The DEWALT® 18V MAX rotary laser has a durable design, adapters for use with tripods and brackets and allows users to use their existing power tool batteries for convenience
- 2 Meter Drop Rating • Vertical and horizontal alignments • Scan Mode 15 / 45 / 90 Degrees
- Includes TSTAK compatible case, detector, glasses, laser target, mounting bracket
- Battery Life: 1.5Ah = 17hrs / 2Ah = 22hrs / 3Ah = 33hrs / 5Ah = 56hrs

Voltage	Beam	Type of Laser	IP Rating	Accuracy	Indoor Visibility	Weight
18V	1	Class 2	54	+/- 3mm @ 30m	45 - 457 M	0.7 kg



CORDLESS TOOLS

3-MODE QUICK-CHANGE SDS+ ROTARY HAMMER | Product Code DCH254N

- Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 24mm
 - Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal • Quick-release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary-only applications
 - Best in class vibration, 6.6m/s² reduces user fatigue and maximises operating periods
- Applications:*
- Wood Drilling to 26mm • Metal Drilling to 13mm • Concrete Drilling to 24mm



Voltage	Power Output	No-Load Speed	Blows per Minute	Impact Energy	Tool Holder	Weight
18V	400 Watts	0 - 1200 rpm	0 - 4500 bpm	2.1 Joules	SDS-Plus	3.2 kg

3-MODE BRUSHLESS SDS+ ROTARY HAMMER | Product Code DCH274N

- Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only application • Category-leading high-speed drilling performance at more than 90 holes (10mm Ø x 80mm) per charge • Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal
 - Perform & Protect: best-in-class vibration at 6.6m/s², minimising user fatigue
- Applications:*
- Wood Drilling to 26mm • Metal Drilling to 13mm • Concrete Drilling to 24mm



Voltage	Power Output	No-Load Speed	Blows per Minute	Impact Energy	Tool Holder	Weight
18V	400 Watts	0 - 1100 rpm	0 - 4600 bpm	2.1 Joules	SDS-Plus	3.3 kg

3-SPEED BRUSHLESS HAMMER DRILL DRIVER | Product Code DCD996N

- NEW automatic high-speed 38,250 bpm increases masonry drilling speed of application
 - NEW 3-position LED torch, High / Medium / Low settings with high output 20min LED delay
 - Tough 3-speed all-metal transmission for increased runtime and longer tool life
 - Electronic clutch with 11-position adjustable torque control for optimised precision when screw driving
- Applications:*
- Wood Drilling to 55mm • Metal Drilling to 15mm • Masonry Drilling to 13mm



Voltage	Power Output	No-Load Speed	Beats per Minute	Max Torque	Tool Holder	Weight
18V	820 Watts	0-450/1300/2000 rpm	0-8600/25500/38250 bpm	95 Nm	Keyless Chuck	2.1 kg

2-SPEED BRUSHLESS COMPACT HAMMER DRILL DRIVER | Product Code DCD796N

- Brushless motor delivers up to 57% more runtime over brushed • Lightweight design
 - Two-speed all-metal transmission for increased runtime and longer tool life • New internal design for optimal airflow, combined with the brushless motor for cool running & durability
 - Super Bright LED is ~ 60 Lumens with 3-position switch Low / Med / High 20min mode
 - Works with ToolConnect™ app to provide additional controls, alerts, and inventory management
- Applications:*
- Wood Drilling to 40mm • Metal Drilling to 13mm • Masonry Drilling to 13mm



Voltage	Power Output	No-Load Speed	Beats per Minute	Max Torque	Tool Holder	Weight
18V	460 Watts	0-550/2000 rpm	0-9350/34000 bpm	70 Nm	Keyless Chuck	1.3 kg



CORDLESS TOOLS

3-SPEED BRUSHLESS IMPACT DRIVER | Product Code DCF887N

- Brushless motor and XR Li-Ion batteries deliver more runtime and capacity over standard units
- Application control is achieved through 3 motor speeds and torque settings including PrecisionDrive
- 1/4" (6.35mm) 'drop in' bit holder allows for quick, one handed fitment
- Compact and lightweight design to fit into tight areas (6mm shorter than the previous DCF886)
- 3x LED "Halo" light ring offers excellent workpiece lighting

Applications:

- Wood Drilling to 40mm • Metal Drilling to 13mm • Masonry Drilling to 13mm



Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Tool Holder	Weight
18V	400 Watts	0-1000, 0-2800, 0-3250 rpm	0-3800 ipm	205 Nm	Drop & Load	0.94 kg

1/2" COMPACT IMPACT WRENCH | Product Code DCF880N

- Latest generation 18V XR Li-Ion compact impact wrench featuring NEW XR Li-Ion battery technology
- 1/2" (12.7mm) square socket retention for effective, efficient torque delivery
- All-metal gearing for efficient power transmission and long tool life
- Aluminium front housing provides greater heat dispersion increasing motor life
- Improved ergonomic design and rubber grip increase comfort and provide greater application control

Applications:

- Variety of fastenings in wood, metal and concrete • Iron mongery and hardware fixtures



Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Bit Holder	Weight
18V	250 Watts	0-2300 rpm	0-2700 ipm	203 Nm	1/2" (12.7mm)	0.93 kg

1/2" 3-SPEED HIGH-TORQUE IMPACT WRENCH | Product Code DCF899N

- 3 speed and torque settings give you the control to best suit your application
- Up to 1625Nm of "breakaway" torque ensures removal of the tightest bolts
- Compact, lightweight design • 1/2" (13 mm) square drive with detent pin allows for more efficient torque delivery and excellent socket retention • Bright LED light
- Designed for comfort, speed control and working in dark spaces

Applications:

- Fastening small metal constructions • Automotive • Heavy machinery servicing



Voltage	Power Output	No-Load Speed	Impacts per Minute	Max Torque	Bit Holder	Weight
18V	610 Watts	0-400/1200/1900 rpm	0 - 2400 ipm	950 Nm	1/2" (12.7mm)	2.62 kg

5" ANGLE GRINDER | Product Code DCG412N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes, delivers up to 7000 rotations per minute for fast cutting and grinding applications • Steel cut spiral bevel gears provide highest level of durability and low vibration, increasing user productivity
- Low profile jam-pot gear case improves gear durability and ergonomics • Intelligent trigger and lock-off switch for enhanced work safety and control

Applications:

- An efficient cordless solution for metal / masonry, cutting and grinding applications



Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
18V	405 Watts	0 - 7000 rpm	M14	125 mm	2.2 kg

GUARANTEED TOUGH.™



SITE SOLUTIONS



CORDLESS TOOLS

165mm CIRCULAR SAW | Product Code DCS391N

- Extremely durable tool design, including a cast magnesium base for repetitive, accurate cuts
- Intelligent trigger allowing total control over all applications • Keyless bevel angle and depth-of-cut adjustment with easy-to-read scale for maximum cordless versatility
- Ultra thin kerf 165mm, 24-tooth carbide-tipped blade allows for efficient runtime and fast, smooth cut finish at maximum 55mm depth of cut

Applications:

- An efficient cordless solution for wood trimming and sizing installation applications



Voltage	Blade Diameter	No-Load Speed	Number of Teeth	Cutting Depth Capacity	Bevel Cuts	Weight
18V	165 x 20 mm	3700 rpm	24	55 mm	Up to 50°	3.2 kg

140mm METAL CUTTING CIRCULAR SAW | Product Code DCS373N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes delivers up to 3700 rotations per minute for fast cutting action • New transparent front guard paired with LED light and unique chemically treated glass window for enhanced line of cut visibility
- Robust cool-running 140mm, 30-tooth tungsten carbide tipped blade for burr-free cuts at constant 43mm cutting depth throughout the life of the blade

Applications:

- An efficient cordless solution for metal cutting and sizing installation applications



Voltage	Blade Diameter	No-Load Speed	Power Output	Cutting Depth Capacity	Weight
18V	140 x 20 mm	3700 rpm	460 Watts	43 mm	3.1 kg

RECIPROCATING SAW | Product Code DCS380N

- Powerful and highly efficient PM58 DEWALT fan-cooled motor with replaceable brushes, delivers fast cutting action up to 2950 strokes per minute and 28.6mm stroke length maximising user productivity
- Intelligent variable-speed trigger, lock-off switch and electronic motor brake for quick, controlled cuts and enhanced work safety • Lever-action keyless blade clamp for quick and easy blade changes • Four-position blade clamp allows for flush cutting and increased versatility

Applications:

- An efficient cordless solution for wood & metal installation trimming and demolition cutting applications



Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Weight
18V	560 Watts	0-2950 spm	28.6 mm	2.7 kg

COMPACT RECIPROCATING SAW | Product Code DCS387N

- Compact saw allows better access to hard-to-reach cuts
- Improved balance and ease of handling due to central motor position
- Four-position blade clamp allows for flush cutting and improved versatility
- Lever action keyless blade clamp for tool-free blade change
- LED for improved visibility of cut

Applications:

- An efficient cordless solution for wood & metal installation trimming and demolition cutting applications



Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Weight
18V	610 Watts	0 - 2900 spm	28.6 mm	2.3 kg



CORDLESS TOOLS

COLLATED DRYWALL SCREWDRIVER | Product Code DCF620KN

- Brushless screwdriver for efficient fitting of drywall - up to 6000 screws per charge
- Tool-free depth control and fine depth control
- Also supplied with locking nose cone so that you can work with the same tool on sites where collated screws are not supplied
- Trigger lock 'on' lets you work without having to pull the trigger
- Rotating detachable screw magazine
- Ergonomically designed rubber grip
- Diagnostics with bright LED indicator communicates battery charge status

Applications:

- Drywall to metal studs
- Drywall to timber studs



Voltage	Power Output	No-Load Speed	Max Torque	Screw Length	Weight
18V	435 Watts	0-4400 rpm	5 - 30 Nm	25 - 57 mm	1.48 kg

JIGSAW | Product Code DCS331N

- Powerful and highly efficient DEWALT PM50 fan-cooled motor with replaceable brushes delivers fast-cutting action up to 3000 strokes per minute maximising user productivity
- Bevel capacity 45°
- Intelligent variable-speed trigger and lock-off switch for quick controlled cuts and enhanced work safety
- Patented anti-vibration counter-balance mechanism and rubber grip providing a smooth operation
- 3-position pendulum action controls the aggressiveness or smoothness of cuts

Applications:

- An efficient cordless solution for cutting wood, metal and plastics



Voltage	Power Output	No-Load Stroke Rate	Stroke Length	Max Cut - Wood	Max Cut - Steel	Weight
18V	400 Watts	0 - 3000 spm	26 mm	135 mm	10 mm	2.4 kg

2-SPEED BRUSHLESS FRAMING NAILER | Product Code DCN692N

- Brushless motor technology and 5.0Ah battery pack provides extreme runtime and extended tool life
- Fires nails up to 90mm in softwood and 63mm in hardwood
- 2-Speed firing / Power Modes (bump or sequential - user selective)
- Can be used with 30° to 34° clipped and round offset head paper tape collated nails from a variety of brands
- Nail Lengths: 50mm - 90mm / Shank Diameters: 2.8mm - 3.3mm
- Shank Types: Smooth and Ring
- Nailer is short enough to be operated between 400mm studs

Applications:

- Stud wall installation
- Roofing
- Joist installation
- Floor board installation
- Decking
- Fencing



Voltage	Impact Energy	Nail Length	Nail Diameter	Magazine Angle	Weight
18V	105 Joules	50 - 90 mm	2.8 - 3.3 mm	30 - 34°	4.1 kg

16Ga BRUSHLESS SECOND FIX NAILER | Product Code DCN660N

- Brushless motor offers runtime that cannot be beaten in a compact package
- Sequential mode allows for precision placement and bump operating mode speed of up to 4 nails per second
- Compact, lightweight and ergonomic design makes the tool easy and comfortable to use but durable enough for worksite environment
- Ideal for 2nd fix applications
- Tool-free depth adjust and jam clear
- Fires 16 gauge 32-63mm nails
- Magazine Capacity: 110 Nails

Applications:

- Skirting boards
- Door and window trim
- Panelling
- Casing
- Cabinetry
- Cap and shoe moulding



Voltage	Gauge	Nail Length	Magazine Angle	Weight
18V	16 Ga	32 - 63 mm	20°	2.35 kg

GUARANTEED TOUGH.™



SITE SOLUTIONS



CORDLESS TOOLS

COMPACT JOBSITE BLOWER | Product Code DCV100N

- Compact and lightweight blower for jobsite clean-up
- Variable speed slider switch with variable speed trigger for improved control
- Inflator / deflator attachments for versatile applications • Reversible transmission with lock-on / off switch
- Up to 18 minutes runtime on maximum speed. Up to 60 minutes runtime on low speed (5.0Ah pack)



Voltage	Power Output	Fan Speed	Air Throughput	Air Speed	Weight
18V	265 Watts	18000 rpm	2.8 m ³ /min	80 m/s	1.3 kg

7.5L CORDED / CORDLESS WET-DRY VACUUM | Product Code DCV584N-LE

- Operates on 14.4V / 18V / 54V XR battery packs & mains supply • Vacuums wet or dry without the need to change the filter • Extremely robust and versatile machine benefits from having a highly efficient washable / replaceable HEPA filter that traps 99.97% of dust as fine as 0.3 Microns
- On-board 2M hose, cord and integrated accessory storage for ease of transport and storage
- One-hand switch and carry for increased versatility and ease of use



Voltage	Power Output	Air Flow	Tank Capacity	Blower	Hose Diameter	Weight
18V	300 Watts	954 L/min	7.5 L	Yes	32 mm	4.8 kg

1.9L HAND-HELD WET-DRY VACUUM | Product Code DCV517N-XJ

- Integrated high-performance washable filter for wet and dry applications traps 99.7% of dust
- Ideal for vacuuming hard-to-reach areas such as cornered workbenches • 1M detachable hose provides flexibility suiting a large range of cleaning applications • Detachable single-latch container for fast emptying • Gripped handle for comfort • Built-in "gulper" nozzle
- 1.9L wet & dry tank capacity can clear large amounts of material



Voltage	Power Output	Air Flow	Tank Capacity	Hose Diameter	Weight
18V	180 Watts	15.9 L/sec	1.9 L	32 mm	2.2 kg

**PERFORM
PROTECT.**



DEWALT
DRIVEN

SITE SOLUTIONS

POWERS
ENGINEERED

BATTERIES & CHARGERS

5.0Ah BLUETOOTH BATTERY | Product Code DCB184B-XE

- New 18V 5.0Ah XR Li-Ion battery pack delivers 66% more runtime than a standard 3.0Ah battery pack
- Security, inventory check and customisation of your battery through Tool Connect Apple and Android App



5.0Ah BATTERY | Product Code DCB184X-XE

- Excellent electrical characteristics
- No memory effect
- New DEWALT 5.0Ah XR Li-Ion battery packs delivers 66% more runtime than a standard 3.0Ah battery pack



54V 6.0Ah BATTERY | Product Code DCB546-XE

- 6.0Ah XR FLEXVOLT Battery
- Voltage steps up to 54V to deliver unprecedented power
- Compatible with all 18V XR and 54V XR FLEXVOLT tools
- Compatible with all 18V XR chargers



54V 9.0Ah BATTERY | Product Code DCB547-XE

- 9.0Ah XR FLEXVOLT Battery
- Voltage steps up to 54V to deliver unprecedented power
- Compatible with all 18V XR and 54V XR FLEXVOLT tools
- Compatible with all 18V XR chargers



XR FAST CHARGER | Product Code DCB118-XE

- Charges both 18V and 54V batteries. The charge time for a 6.0Ah battery is 60 mins



XR DUAL PORT CHARGER | Product Code DCB132-XE

Charges 2 batteries simultaneously - 10.8V, 18V and / or 54V



GUARANTEED TOUGH.™





XR FLEXVOLT™ HIGH-POWER SDS-PLUS ROTARY HAMMER | Product Code DCH333NT-XJ

- Category-leading high-speed drilling performance at more than 66 holes (18mm Ø x 80mm) per charge
- Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary-only drilling in wood and metal
- Brushless motor for extreme runtime and reduced maintenance
- Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 30mm



Voltage	No Load Speed	Impact Energy	Blows per Minute	Max Drilling Capacity		Weight	
54V	0 - 1000 rpm	3.5 Joules	0 - 4480 bpm	Concrete - 30 mm	Wood - 30 mm	Metal - 13 mm	3.7 kg

XR FLEXVOLT™ BRUSHLESS SDS-MAX ROTARY HAMMER | Product Code DCH481N-XE

- True corded performance
- Anti-rotation system detects a loss of tool control and reacts by instantly cutting the power
- Rotation-stop mode for chiselling and impact stop mode for rotary-only drilling with dry diamond cores
- Low vibration at 9.4m/s², minimising user fatigue
- Brushless motor for improved runtime and reduced maintenance



Voltage	No Load Speed	Impact Energy	Blows per Minute	Max Drilling	Weight
54V	0 - 540 rpm	6.1 Joules	0 - 3150 bpm	Concrete - 40 mm	5.4 kg

XR FLEXVOLT™ PLUNGE SAW | Product Code DCS520NT-XJ

- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- 42-tooth blade gives a fine and accurate finish with very little breakout in laminates
- Variable speed allows the correct speed to be set for different types of materials
- Anti-kickback function stops the saw from moving backwards along the rail
- Enclosed guard gives 90% dust extraction capability

Applications:

- Fitting kitchen worktop, sink, hob cut-outs and doors
- Cutting plastics, fibreglass, MDF and plywood



Voltage	No Load Speed	Blade Diameter	Blade Bore	Bevel Capacity	Max Depth of Cut (with guide rails)		Weight
54V	2500 - 4200 rpm	165 mm	20 mm	47°	90° - 59 mm	45° - 44 mm	4.7 kg

XR FLEXVOLT™ CIRCULAR SAW | Product Code DCS575N-XE

- Achieves an output of 1300W and a run-speed of up to 5800rpm, resulting in faster cuts
- Airlock compatibility for superior dust management
- On board quick depth and quick bevel adjustment minimises downtime
- LED illumination, cutaway guard and dust blower ensure excellent cut visibility

Applications:

- Ripping sheet material
- Cutting large diameter timber over 67mm
- General construction



Voltage	Speed	Blade Diameter	Blade Bore	Bevel Capacity	Max Depth of Cut		Weight
54V	5800 rpm	184mm	20mm	57°	90° - 67 mm	45° - 49 mm	3.6 kg

XR FLEXVOLT™ 125mm ANGLE GRINDER | Product Code DCG414N-XJ

- Enhanced battery runtime combined with DeWalt's highly efficient 54V brushless motor allows for longer duration applications
- Safety Brake: Less than 2.0 seconds
- Electronic clutch reduces kickback reaction in the event of a pinch or stall
- 2-position side handle offers greater safety and control
- Up to 126 cuts of 12mm reinforcing bar, up to 42 cuts of 20mm reinforcing bar, up to 402 cuts / 86m of SL72 reinforcing mesh



Voltage	Speed	Spindle Thread	Max Disc Diameter	Weight
54V	9000 rpm	M14	125 mm	2.2 kg



GUARANTEED TOUGH™



SITE SOLUTIONS



XR FLEXVOLT™ 216mm MITRE SAW | Product Code DCS777

- Power of a corded saw with the portability of a cordless saw • XPS shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity
- Up to 331 cuts of 90mm x 35mm structural pine, up to 90 cuts of 200mm x 50mm treated pine sleeper
- Integrated positive mitre stops at 15°, 22.5°, 30°, 45°, quick-release mitre mechanism up to 50°
- Air-Lock compatible dust extractor • Sliding left hand fence with measuring scale



Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Mitre Capacity	Max Cut Depth	Weight
54V	216 mm	30 mm	6300 rpm	48°	50 / 50°	80 mm	14 kg

XR FLEXVOLT™ 305mm DOUBLE BEVEL SLIDING COMPOUND MITRE SAW | Product Code DWS780

- Outstanding cutting performance in both small profiles and large construction timbers up to 110 x 303mm
- XPS shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity- no adjustment required • Simple setting of bevel angles up to 49° left and right • Cam action mitre lock allows the user to quickly adjust angles between 0° - 50° left and 0° - 60° right • Linear horizontal rails allow cutting materials up to 345mm wide



Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Mitre Capacity	Max Cut Depth	Weight
54V	305 mm	25.4 mm	3800 rpm	49 / 49°	60 / 50°	170 mm	24.8 kg

XR FLEXVOLT™ 295mm ALLIGATOR SAW | Product Code DCS396

- Ideal for cutting through hollow clay blocks, aerated concrete, timber and insulation materials
- Features two durable blades with a thicker sword for reduced deflection and a more accurate cut
- Integrated blade clamp enables the entire sword to pass through the substrate with ease
- Sturdy aluminium gearcase housing reduces weight and provides excellent durability
- Ultra low vibration 4.1m/s², up to 50 cuts of 200mm x 50mm treated pine sleeper



Voltage	No Load Stroke Rate	Blade Length	Stroke Length	Length	Height	Weight
54V	2400 spm	29.5 mm	40 mm	775 mm	219 mm	5.5 kg

XR FLEXVOLT™ TABLESAW | Product Code DCS7485

- Introducing the world's first cordless table saw from DEWALT • Lightweight, compact and easy to move
- Highly accurate rack & pinion adjustable fence system • Cuts 92 metres of 19mm OSB on a single charge • Cuts up to 83M of 19mm plywood, up to 110M of hardwood veneer laminate flooring and up to 75M of 16mm melamine • Site-tough steel roll cage

Applications:

- Fitting solid wood flooring and decks • Concrete form work • Sizing timber for joinery



Voltage	Blade Diameter	Blade Bore	Blade Speed	Bevel Capacity	Max Rip Capacity (Right)	Max Rip Capacity (Left)
54V	210 mm	30 mm	5800 rpm	-3° to 48°	610 mm	318 mm

Max Depth Cut at 90°	Max Depth Cut at 45°	Table Size	Depth	Length	Height	Weight
65 mm	45 mm	485 x 485 mm	605 mm	605 mm	330 mm	21.5 kg

XR FLEXVOLT™ RECIPROCATING SAW | Product Code DCS388

- Class-leading, low-vibration (12.5m/s²) reciprocating saw • Well-balanced with an ergonomic body grip and back handle • Tool-free blade change • Two-position blade clamp allows for flush cutting and increased versatility • Up to 157 cuts 90mm x 35mm of structural pine, up to 497 cuts of 100mm x 100mm PVC waste pipe

Applications:

- An efficient cordless solution for wood and metal installation trimming and demolition



Voltage	No-Load Stroke Rate	Stroke Length	Max Cutting Capacity			Weight
54V	0 - 3000 spm	28.6 mm	Wood - 300 mm	Steel Sections & Pipes - 130 mm	PVC - 160 mm	3.6 kg

CUTTING & GRINDING

CIRCULAR SAW BLADES






















					 <p>Optimised for DCS575</p>  <p>36T Blade</p>
Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Shear	
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts	
<p>Sizes and Product Details available at www.dewalt.com.au</p>					

TABLE SAW BLADES

					 <p>Optimised for DCS7485</p>  <p>24T Blade</p>
Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Shear	
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts	
<p>Sizes and Product Details available at www.dewalt.com.au</p>					

MITRE SAW BLADES

					 <p>Optimised for DCS777</p>  <p>36T Blade</p>
Sub Micron Grade Carbide Tips	Patented Body Slots	ATB+R Grind	Optimised Hook Angle	Optimised Face Shear	
Long Life	Low Vibration	Cut Quality & Efficiency	Low Cutting Force	Fast Cuts Smooth Efficient Cuts	
<p>Sizes and Product Details available at www.dewalt.com.au</p>					

RECIPROCATING SAW BLADES

			<p>152mm Metal Blade</p>  <p>Optimised for DCS388</p> <p>152mm Wood & Nails Blade</p> 
14 / 18 and 4 / 6 Tooth Pattern	Tough Coat® Finish	High-Speed Steel Teeth	
Fast Cuts	Helps Reduce Heat Buildup	Long Life & Durability	
<p>Sizes and Product Details available at www.dewalt.com.au</p>			



CUTTING & GRINDING

CUTTING DISCS



High Performance
Ceramic Grain


Tough and durable. Many cutting edges.
Stays sharper longer for fast cuts.



High Density
Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au



Optimised for
DCG414



125mm x 1.1 x 22.23mm

GRINDING DISCS



High Performance
Ceramic Grain

Tough and durable. Many cutting edges.
Stays sharper longer for fast cuts.



High Density
Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au



Optimised for
DCG414



125mm x 3.0 x 22.23mm

FLAP DISCS



High Performance
Ceramic Grain

Tough and durable. Many cutting edges.
Stays sharper longer for fast cuts.



High Density
Grain Concentration

For fast cutting and low heat build-up

Sizes and Product Details available at www.dewalt.com.au



Optimised for
DCG414



60G 125mm x 22.23mm

ALLIGATOR SAW BLADES

HSS Wood Blade

Fast cutting of Softwood, Hardwood, Hardboard,
Plasterboard and Fibreboard




XR 295mm Wood Blade

TCT Low Density Building Block Blade

Rapid cutting of low density thermal building
blocks up to 12N/mm² such as aerated concrete
(Hebel®)



XR 295mm Poroton Blade



Optimised for
DCS396

Sizes and Product Details available at www.dewalt.com.au



CORDED GRINDERS

ANGLE GRINDER 230mm (9") (FULLY FEATURED) | Product Code DWE4599N-XE

- Autobalancer gives low vibration (4.5m/s^2 triaxially) resulting in greater end-user comfort and protection
- Torque-limiting electronic clutch reduces the maximum torque reaction transmitted to the operator if the disc jams and prevents the disc from 'locking on'
- Overload protection will prevent the motor overheating by shutting off the unit until the unit cools down
- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Spindle lock for quick wheel changes



Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	2400 Watts	6500 rpm	M14	230 mm	6.2 kg

ANGLE GRINDER 125mm (5") | Product Code DWE4257-XE

- Electronic variable speed control
- Electro-mechanical clutch reduces the "kickback" transmitted to the operator if the cutting disc jams
- Anti-vibration side handle
- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Overload protection will prevent the motor overheating by shutting off until the unit cools down
- Soft start to limit start-up current and reduce kick back
- No-volt release switch will prevent the unit starting when plugged in, even if the switch is in the on position - switch must be consciously reset before power is delivered



Voltage	Power Input	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	1500 Watts	2800 - 10000 rpm	M14	125 mm	2.6 kg

ANGLE GRINDER 180mm (7") (FULLY FEATURED) | Product Code DWE4597N-XE

- Torque-limiting electronic clutch reduces the maximum torque reaction transmitted to the operator if the disc jams
- Dust Ejection System protects from abrasion damage increasing the life of the tool
- Overload protection will prevent the motor overheating by shutting off until the unit cools down
- Soft-start to limit start-up current and reduce kick back
- No-volt release switch prevents the unit starting when plugged in, even if the switch is on position - switch must consciously reset before power is delivered



Voltage	Power Output	No-Load Speed	Spindle Thread	Max Disc Diameter	Weight
240V	2400 Watts	8500 rpm	M14	180 mm	5.6 kg

**PERFORM
PROTECT.**

GUARANTEED TOUGH.™

3 YEAR LIMITED WARRANTY
1 YEAR FREE SERVICE CONTRACT
30 DAY MONEY BACK GUARANTEE



DEWALT
DRIVEN

SITE SOLUTIONS

POWERS
ENGINEERED

COMBIHAMMERS

4KG SDS-PLUS COMBINATION HAMMER with QCC | Product Code D25414KT-XE

- Active vibration control with floating back handle delivers extremely low vibration and more comfort
- Quick-change 3-jawed chuck provides speed, precision and flexibility when drilling in wood, ceramic and steel
- Rotation-stop for light chiselling applications, render and tile removal
- Ideal for drilling large anchor, fixing and through holes in concrete and masonry from 6 to 32mm in diameter
- Electronic variable speed switch
- Impact-stop for drilling in wood, ceramic, steel and screwdriving applications

Includes:

- Quick-release SDS+ removable tool holder / Quick-release 3 jaw removable chuck / Multi-position side handle / Heavy duty carrying case / SDS+ Chisel / 2 x SDS+ drill bits / 4 x HSS drill bits / 4 x brad point wood drill bits / 2 x flatwood drill bits / Safety glasses / Gloves



Voltage	Power Output	Max Drilling Capacity			Blows per Minute	Impact Energy	Weight
240V	450 Watts	Concrete - 32 mm	Wood - 32 mm	Metal - 13 mm	0 - 4700 bpm	4.2 Joules	4.3 kg

5KG SDS-MAX COMBINATION HAMMER | Product Code D25481K-XE

- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 40mm in diameter - core drilling up to 100mm
- Ergonomic, compact and slim-line design maximises control and offers easy access to confined spaces
- Rotation stop mode for chiselling and impact stop mode for rotary only drilling with dry diamond cores
- Low vibration at 9.4m/s² minimises user fatigue
- Multi-position side handle



Voltage	Power Input	Load Speed	Max Drilling Capacity	Blows per Minute	Impact Energy	Weight
240V	1050 Watts	540 rpm	Concrete - 40 mm	0 - 3150 bpm	6.1 Joules	5.9 kg

6KG SDS-MAX COMBINATION HAMMER | Product Code D25601K-XE


- Excellent power to weight ratio: 8 Joules of impact energy delivered by a 6.8kg hammer
- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45mm in diameter - core drilling up to 100mm
- Chain drive improves durability and increases efficiency together with an oil-filled gearbox to ensure total component lubrication and superior heat dissipation
- Active Vibration Control system incorporates a floating rear handle and damped side handle to reduce vibration
- Lock-on switch for greater control when in chipping mode



Voltage	Power Output	Load Speed	Max Drill Hole	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	615 Watts	210 - 415 rpm	45 mm	1430 - 2840 bpm	8 Joules	SDS-Max	6.8 kg

7KG SDS-MAX COMBINATION HAMMER | Product Code D25722K-XE

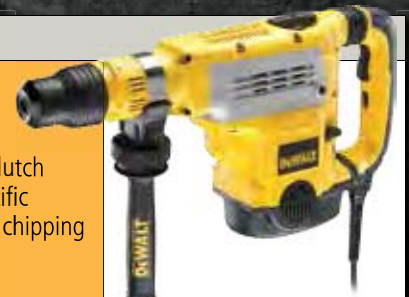- Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48mm in diameter - core drilling up to 125mm
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- Patented 2-stage clutch allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications
- Electronic variable speed and impact energy control
- Lock-on switch for chipping
- Rotation-stop for demolition applications in brick, masonry and light chasing in concrete



Voltage	Power Output	Load Speed	Max Drill Hole	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	840 Watts	137 - 275 rpm	48 mm	1260 - 2520 bpm	11 Joules	SDS-Max	9.1 kg

COMBIHAMMERS

DRILL & HOLE CLEANING SYSTEM | Product Code DWH050K-XJ

- Ideal for dust-free drilling up to 52mm in diameter and unlimited depth
- Compatible with all professional dust extractors
- Durable rubber seal allows for adhesion to most masonry surfaces
- Interchangeable drilling heads for optimum dust removal
- Flexible hose allows for 360 degree vertical and horizontal orientation
- Includes hole cleaning nozzles to expose the full drilled depth and to ensure maximum adhesion of anchor fixings

Includes:


- Heavy duty carrying case / 2 x interchangeable drilling heads / 2 x hole cleaning nozzles



Collar Diameter	Max Drill Bit Diameter	Hose Length	Hose Diameter	Weight
0-38 mm & 38-52 mm	52 mm	90 mm	44 mm	0.6 kg

SDS-PLUS EXTRACTION TELESCOPE (Fits Dust Extractor Vac) | Product Code D25301D-XJ

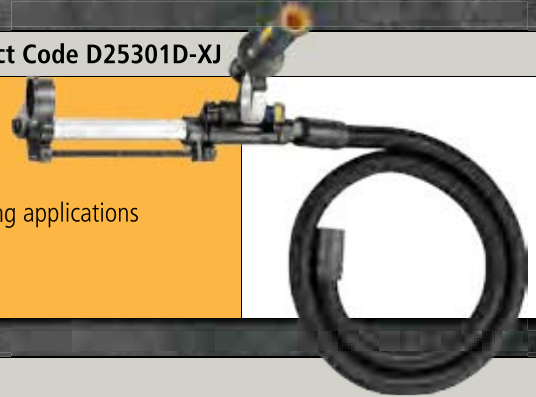- For use with DEWALT corded and cordless SDS-Plus hammers
- Ideal for dust-free drilling up to 16mm in diameter
- Quick-fit system for easy tool-free assembly and release
- Tough, versatile and lightweight (1.2kg) to meet the needs of the most demanding applications
- 1500mm heavy duty rubber hose for maximum reach
- Collar Diameter: 43mm / 54mm



SDS-MAX & PLUS XLR Premium 4-Cutter Drill Bits

- High-quality hammer drill bit with 4-cutter X-head design for improved user comfort, reduced vibration and improved hole quality
- 4-Flute spiral with maximised flute entry increases drilling speed and debris removal



SDS-PLUS EXTREME 2-Cutter Drill Bits

- Longer life, faster drilling and greater durability
- Superior carbide grade
- Optimised flute design allows efficient debris removal
- Hardened body for extra strength and reduced breakage
- New tip design ensures better bit penetration



CHISEL POINTED 300mm

- Toughened steel ensures tough bits
- Micro-processor controlled heat treatment for consistently tough, long-life chisels



CHISEL FLAT 300mm

- Toughened steel ensures tough bits
- Micro-processor controlled heat treatment for consistently tough, long-life chisels



BREAKERS

10KG HAMMER - SDS-MAX | Product Code D25902K-XE

- Powerful and durable 1550 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In-line design for better handling and quick-change chisel adjustment allows fast orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight
- Soft-start feature ensures accurate clean breaking without chisel walking



Voltage	Power Output	Blows Per Minute	Impact Energy	Tool Holder	Weight
240V	750 Watts	1050 - 2100 bpm	19 Joules	SDS-Max	10.5 kg

12KG HAMMER - 19mm HEX | Product Code D25941K-XE

- Powerful and durable 1600 Watt motor delivers outstanding concrete breaking performance
- Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
- In-line design for better handling and quick-change chisel adjustment allows orientation of the chisel through 12 preset positions
- Magnesium housings ensure maximum durability and minimum weight
- Soft-start feature ensures accurate clean breaking without chisel walking



Voltage	Power Output	Blows Per Minute	Impact Energy	Tool Holder	Weight
240V	790 Watts	1620 bpm	22.5 Joules	19 mm Hex	13.8 kg

16KG HAMMER - 30mm HEX | Product Code D25961K-XE

- Highest productivity due to an optimum balance of power, impact energy and vibration
- Lowest vibration in the 16kg class ensures the highest trigger time
- 50% longer service intervals than the nearest competitor for lower running costs and less down time
- Robust and proven design provides the longest lasting 16kg breaker
- Soft start feature ensures accurate clean breaking without chisel walking



Voltage	Power Output	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	1000 Watts	1450 bpm	35 Joules	30 mm Hex	16.9 kg

30KG PAVEMENT BREAKER - 28mm HEX | Product Code D25980-XE

- Large oversize mechanism delivers extreme durability and excellent breaking performance
- 2000 Watt motor delivers outstanding efficiency and durability
- Active Vibration Control offers safer, more comfortable use and more productivity
- Suspended Handle System absorbs the rebound and, working with the AVC, delivers the lowest vibration on the market
- Heavy duty electronic module for constant power under load
- Easy-to-service design to reduce repairing costs



Voltage	Power Output	Blows per Minute	Impact Energy	Tool Holder	Weight
240V	986 Watts	870 bpm	43.8 Joules	28 mm Hex	31 kg



GUARANTEED TOUGH.™



SITE SOLUTIONS



BREAKERS

LARGE HAMMER DUST EXTRACTION - CHISELLING | Product Code DWH051K-XJ

- Compatible with all DEWALT SDS-Max / 19mm HEX combination hammers and breakers
 - Accepts any DEWALT pointed, flat chisels and bushing tools and can be connected to any professional dust extractor
 - Quick-release and tool-free connection
 - 3x different length flexible nozzles for optimum dust extraction
 - Impact resistant and flexible body allows for maximum durability and long life
- Includes:*
- Heavy duty carrying case / 3 x interchangeable nozzles / 2 x tool holder adaptors



Max Chisel Diameter	Lengths	Height	Width	Weight
27 mm	210 mm / 282 mm / 355 mm	105 mm	173 mm	0.8 kg

LARGE HAMMER DUST EXTRACTION DEMO | Product Code DWH052K-XJ


- Compatible with all DEWALT demolition hammers and breakers
 - Accepts any DEWALT pointed, flat chisels and bushing tools up to 32mm wide and can be connected to any professional dust extractor
 - Fully adjustable, quick-release and tool-free connection
 - Impact resistant dust nozzle and flexible hose allows for maximum durability and long life
- Includes:*
- Heavy duty carrying case



Max Chisel Diameter	Hose Length	Hose Diameter	Height	Width	Length	Weight
32 mm	730 mm	44 mm	105 mm	173 mm	860 mm	0.85 kg

DUST EXTRACTOR VACUUM 38L | Product Code DWV902M-XE

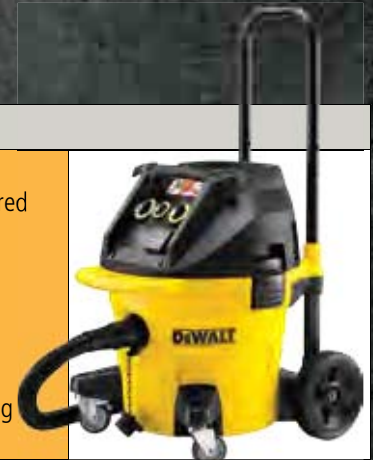- Wet and dry pick up with variable suction control allows for the reduction of suction power if required
 - Constant suction power even with the finest concrete and wood dust
 - The filter is automatically cleaned every 15 seconds reducing filter clogging and delivering constant air flow
 - Large rear wheels • Front handle / bumper protect hose connection
 - Rugged telescopic handle • Increased durability and portability
 - The machine continues to run for an extra 15 seconds to allow all dust to be cleared from system
- Includes:*
- 4.6M x 32mm extraction hose / 35mm AirLock adapter / Stepped Rubber AirLock adapter / Dust bag



Power Input	Max Airflow	Wet / Dry Capacity	Capacity	Height	Weight
1400W	4080 L/m	18.4 L	38 L	695 mm	15 kg



GUARANTEED TOUGH.™



SITE SOLUTIONS





3 YEAR LIMITED WARRANTY
* CONDITIONS APPLY

1 YEAR FREE SERVICE CONTRACT

30 DAY NO RISK SATISFACTION GUARANTEE

GUARANTEED TOUGH WARRANTY

The 3 Year Limited Warranty

is a repair warranty that applies to DEWALT branded products* in the unlikely event that the product becomes defective within 3 years of purchase due to faulty materials or workmanship. DEWALT guarantees to replace all defective parts free of charge or at discretion replace the unit. Proof of purchase required.

The 1 Year Service Contract

applies to DEWALT branded products that require maintenance or service within 12 months of purchase. DEWALT will provide 1 service free of charge, undertaken by an authorised DEWALT service agent. Proof of purchase required.

The 30 Day No Risk Satisfaction Guarantee

If not completely satisfied with the performance of the DEWALT product, it can be returned to the point of purchase within 30 days for a full refund or exchange. Proof of purchase required.

* Unless specifically excluded within the product warranty information

SALES ... SERVICE ...SUPPORT

POWERS is committed to supplying quality fastening systems to the construction industry. Part of this focus involves providing national technical on-site representation by our Sales Team and Field Engineers to the contractor and specifier, ranging from on-site training, site testing and specification support of POWERS products.

POWERS delivers fastening solutions in 5 different categories - each offering cost savings and design advantages for the contractor, engineer and end user.



MECHANICAL ANCHORS



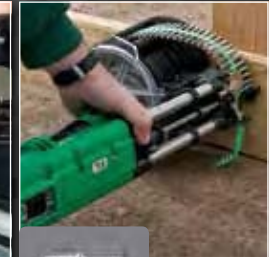
ADHESIVE ANCHORS



DRILLING & CUTTING



FORCED ENTRY



SCREWS & RIVETS

POWERS support programs and facilities



National Engineering and Specification Support provided by a team of qualified engineers



National Training Program



In-house Testing Facility



National On-Site Testing



Construction Site Training to service the needs of the contractor on-site



ENGINEERING SUPPORT - POWERS DESIGN ASSIST

Powerful Calculations with fast, detailed results with no downloads required.

The Powers Design Assist (PDA) software program provides anchoring solutions in a dynamic environment with real-time results. It is based on ETAG (European) and AC 318 (USA) design methods only. The program allows users to select a region throughout the world and design their application based on products from that region. This provides greater flexibility and a wider product offering to all users.



PDA - Realtime Anchor Design Software



AEFAC MEMBERSHIP

POWERS is one of the founding members of AEFAC (Australian Engineered Fasteners and Anchor Council).

AEFAC is a consortium made of six leading industry partners / suppliers of quality anchors to the construction industry and Swinburne University of Technology.

AEFAC is a new industry-focused initiative which aims to set the standard for the specification, selection, design, applications and installation of structural anchors and fasteners in the Australian construction industry. AEFAC aims to enhance safety and efficiency associated with the use of structural anchors and fasteners. AEFAC is based at Swinburne University of Technology with access to state-of-the-art testing and research capabilities. The guidelines and resources being developed by AEFAC are intended to become the codes of practice in Australia.

As well as being a founding member, POWERS is also on the Board and Technical Committee of AEFAC. POWERS also retains membership in several international organisations including Concrete Anchor Manufacturers.

ADHESIVE ANCHORING

PURE150-PRO PURE EPOXY INJECTION SYSTEM | Product Code PURE150PRO-585-PWR

- High-strength, longer gel / working time and easier handling (extrudes better)
 - Low odour
 - Fire rated
 - Approved for use in diamond core-drilled holes
 - Suitable for water-filled holes
- Suitable base materials:*
- Concrete
 - Solid Brick
 - Solid Block
 - Structural Steel
 - Block
 - Grout Filled Block
 - Steel



Box Qty	Carton Qty
1	10

PURE110-PRO EPOXY INJECTION SYSTEM | Product Code PURE110PRO-585-PWR

- Our newest two-component epoxy
- High-strength adhesive suitable for bonding steel elements to cracked and uncracked concrete
- Suitable for water-filled holes
- Suitable for a wide range of ambient temperatures

Suitable base materials:

- Concrete
- Solid Brick
- Solid Block
- Structural Steel
- Block
- Grout Filled Block
- Steel



Box Qty	Carton Qty
1	10

AC100-PRO VINYLESTER INJECTION SYSTEM | Product Code AC100PRO-PWR

- Versatile low-odour, styrene-free anchoring system
- Variable embedment depth applications
- Designed for use with standard threaded rod
- Quick curing time
- Fits standard caulking guns

Suitable base materials:

- Concrete
- Solid Brick
- Solid Block
- Structural Steel
- Block
- Grout Filled Block
- Steel



Box Qty	Carton Qty
1	10

AC200-PRO VINYLESTER INJECTION SYSTEM- COMING Q3 - 2017

PV45-PRO POLYESTER INJECTION SYSTEM | Product Code PV45PRO-PWR

- For light to medium-duty applications using screen tubes
- Ideal for close-to-edge applications
- Cartridge design allows multiple uses using extra mixing nozzle

Suitable base materials:

- Concrete
- Solid Brick
- Solid Block
- Structural Steel
- Block
- Grout Filled Block
- Steel



Box Qty	Carton Qty
1	10

AC100e POLYESTER INJECTION SYSTEM | Product Code AC100E-PWR

- Versatile low-odour, styrene-free anchoring system
- Variable embedment depth applications
- Designed for use with standard threaded rods
- Quick curing time
- Fits standard caulking guns

Suitable base materials:

- Concrete
- Solid Brick
- Solid Block
- Structural Steel
- Block
- Grout Filled Block
- Steel



Box Qty	Carton Qty
1	10

FOAM & ADHESIVE

POWERFOAM EXPANDING FOAM | Product Code SF600-PWR

- One-part polyurethane foam that expands, sets and cures to its final form by reacting to moisture and humidity present in air
- Exceptional ability to bond to various building materials
- Neutral odour as it is being dispensed
- Cured foam is standard yellow

Suitable base materials:

- Concrete
- Masonry
- Metal
- Wood



Box Qty	Carton Qty	Can Size
1	12	750 ml

TRIGGERFOAM EXPANDING FOAM | Product Code TF600-PWR

- One-part polyurethane foam that expands, sets and cures to its final form by reacting to moisture and humidity present in air
- Exceptional ability to bond to various building materials
- Neutral odour as it is being dispensed
- Cured foam is standard yellow

Suitable base materials:

- Concrete
- Masonry
- Metal
- Wood




Box Qty	Carton Qty	Can Size
1	12	750 ml

TRIGGERFOAM TOOL PROFESSIONAL / DISPOSABLE | Product Code TFTOOL-PWR / Product Code TFTOOLDIS-DIS

- For dispensing Triggerfoam and Powerfoam 750ml cans



TFTOOL



TFTOOLDIS

Box Qty	Carton Qty
1	n/a

FIRE-POWER FLAME RESISTANT POLYURETHANE FOAM | Product Code 8174-PWR

- Self-expanding, ready-to-use polyurethane foam with propellants
- Completely harmless to ozone layer
- Fire rated up to 360 minutes in certain conditions

Suitable base materials:

- Concrete
- Aerated Concrete



Box Qty	Carton Qty	Can Size
1	1	750 ml

POWERSTICK POLYMER ADHESIVE | Product Code 8166-PWR

- Easy-to-use polymer in a convenient cartridge system
- All-purpose adhesive and sealant
- Can be used for most interior and exterior applications

Suitable base materials:

- Concrete
- Solid Brick
- Hollow Brick
- Solid Block
- Hollow Core Block
- Structural Steel
- Grout Filled Block
- Steel
- Natural Stone
- Plasterboard
- Aerated Concrete
- Wood




Box Qty	Carton Qty	Tube Size	Colour
1	12	300 ml	White

ANCHORING

BLUE-TIP SCREWBOLT - HEX HEAD - GALVANISED / ZINC PLATED CARBON STEEL

- ETA Option 1 approval for cracked and uncracked concrete • Approved for very small edge distances
 - Full grip over total anchor length • One-piece design • Low installation torque
- Suitable base materials:*
- Concrete • Lightweight Concrete • Solid Brick • Hollow Brick



Size Range	Head Diameter	Fixture	Length	Box Qty	Carton Qty
5 mm x 50 mm to 16 mm x 160 mm	Information available at www.powers-guide.com.au				

BLUE-TIP SCREWBOLT - HEX HEAD - COUNTERSUNK - ZINC PLATED CARBON STEEL


- ETA Option 1 approval for cracked and uncracked concrete • Approved for very small edge distances
 - Full grip over total anchor length • One-piece design • Low installation torque
- Suitable base materials:*
- Concrete • Lightweight Concrete • Solid Brick • Hollow Brick



Size Range	Head Diameter	Fixture	Length	Box Qty	Carton Qty
6.5 mm x 50 mm to 12 mm x 150 mm	Information available at www.powers-guide.com.au				

PBI BRACE-IT ANCHOR - HEX HEAD - CARBON STEEL YELLOW ZINC PASSIVATED


- Unique head markings for easy product traceability and effective on-site inspection
 - Large 30mm A/F hex head for use with 20mm ferrule bolt sockets
 - Nylon compression ring ensures positive grip of anchor in drilled hole and fixture
- Suitable base materials:*
- Concrete • Cracked Concrete • Solid Brick • Natural Stone



Size Range	Drill Diameter	Embedment	Fixture	Torque	Box Qty	Carton Qty
M12 x 115mm to M14 x 115mm	Information available at www.powers-guide.com.au					

PTB-ETA1-PRO THROUGH BOLT - ZINC PLATED CARBON STEEL / GALVANISED / STAINLESS STEEL

- Anchor diameter same as that of hole size which eliminates the need for hole-potting or layout
 - Three-piece, heavy-duty steel expander sleeve for efficient high-slip loading
 - Extra-long thread for fixture adjustment and packing
- Suitable base materials:*
- Concrete • Cracked Concrete



Size Range	Drill Diameter	Embedment	Fixture	Box Qty	Carton Qty
M10 x 80 mm to M20 x 200mm	Information available at www.powers-guide.com.au				



CONCRETE NAIL FASTENING

TRAK-IT C5 CONCRETE NAILER KIT

- Direct fuel injection • Available in long and short trak (most compact and manoeuvrable tool on the market) • Lightest and easiest to handle • Easy depth adjustment • Swing trigger for smoother action • Optimal dust protection - less maintenance with metal mesh suction filter
- Easy-change magazine • Uses dust-free fuel cell with nozzle piston - fewer clogs

Suitable base materials:

- Normal-Weight Concrete • Lightweight Concrete • Grouted Concrete Masonry
- Hollow Concrete Masonry

Kit contains:


- Tough Carry Case / Battery / Charger Base / Adapter Cord / Pin Jam Clear Tool



Power	Weight	Body	Pin Length	Pin Diameter	Shots per Fuel Cell
105 joules	C5 - 3.4 kg C5-ST - 3.3 kg	Precision moulded aluminium and plastic	15 mm to 40 mm	2.6 mm to 3.0 mm	900 (approx)

TRAK-IT C5 POLE TOOL | Product Code 56347-PWR

- Unique design incorporating tool cradle and locking strap
- Adjustable - can be easily extended or shortened
- Swivel hand grip • Rigid no-flex construction
- Disassembles quickly for jobsite storage



TRAK-IT STEP AND STRAIGHT SHANK 20mm to 35mm PINS & GAS

Suitable for:

- Metal track to concrete • Fixture to concrete or block




Step Shank Pin	Straight Shank Pins	Box Qty
3.0 x 13 mm	2.6 x 20 mm and 2.6 x 35 mm	1000

TRAK-IT TWIST SHANK PINS & GAS

Suitable for:

- Plywood or Denz-Glass (with washer) to steel stud




Twist Shank Pin	Box Qty
2.6 x 35 mm	1000

TRAK-IT PINS FOR HARD CONCRETE & GAS

Suitable for:

- Fixture to concrete or block • Plywood to steel



Hard Concrete Pins	Box Qty
17 mm and 22 mm	1000

CONCRETE NAIL FASTENING

PA3500EX-PWR POWDER ACTUATED .27 CAL SEMI-AUTOMATIC EX KIT

- High-quality, high-powered, low-velocity, semi-automatic tool
- Designed for high-speed and repetitive volume applications
- Automatic .27 caliber strip-load advance system
- Engineered plastic body with rubber handle pad to minimise the effects of recoil
- Tool drives the fastener into base material using the indirect acting piston principle

Suitable base materials:

- Concrete • Solid Brick • Solid Block • Structural Steel • Block • Grout Filled Block • Steel



Length	Weight	Pin Type	Pin Length Range	Load Type	Power Level
370 mm	2.3 kg	7.6 mm Head Drive Pin 8 mm Head Drive Pin 1/4" - 20 Threaded Stud	13 mm to 75 mm	.27 Caliber in a 10-Load Strip	Green (3) Yellow (4) Red (5)

P3X DELUXE TOOL KIT (.25 CAL X 10MM DISC)

- Low-velocity automatic tool
- Designed for high-speed and repetitive volume applications
- Complies with Design and Construction requirements of AS / NZS 1873.2:2003
- Powder actuated single-shot (installs pins up to 75mm in total length) or magazine (installs pins in a 10-strip format up to 60mm in total length)
- Engineered plastic body with rubber handle pad to minimise the effects of recoil
- Tool drives the fastener into base material using the indirect acting piston principle

Suitable base materials:

- Your tool of choice for fastening through metal, timber and concrete



Length	Weight	Pin Type	Pin Length Range	Load Type	Power Level
430 mm (without magazine) 455 mm (with magazine)	2.8 kg (without magazine) 3.2 kg (with magazine)	8.6 mm Head Drive Pin	15 mm to 60 mm total length (with magazine)	.25 Caliber in a 10-Load Disc (6.3 / 10)	Yellow (4) Red (5)

8MM DRIVE PINS

Suitable base materials:

- Concrete • Solid Brick • Solid Block • Structural Steel • Block • Grout Filled Block • Steel



Description	Head Diameter	Shank Diameter	Pin Lengths	Box Qty	Carton Qty
2-1/2" x 8 mm head	8 mm	3.7 mm	16 mm to 97 mm	100	1000

8MM BALLISTIC POINT STEP DRIVE PINS

Suitable base materials:

- Concrete • Solid Brick • Solid Block • Structural Steel • Block • Grout Filled Block • Steel



Description	Head Diameter	Shank Diameter	Pin Lengths	Box Qty	Carton Qty
60 mm x 8 mm head	8 mm	4 mm	50 mm to 75 mm	100	1000

8MM COLLATED DRIVE PINS

Suitable base materials:

- Concrete • Solid Brick • Solid Block • Structural Steel • Block • Grout Filled Block • Steel



Description	Head Diameter	Shank Diameter	Pin Lengths	Box Qty	Carton Qty
72 mm x 8 mm head	8 mm	3.8 mm	16 mm to 72 mm	100	1000

CUTTING & GRINDING

PGCSR SINGLE ROW CONCRETE GRINDING CUP | Product Code PGCSR125-PWR


- Economical and perfect for flat grinding
 - For removal of imperfections in concrete
 - For dry grinding
- Suitable base materials:*
- Cured Concrete
 - Clay Bricks
 - General Masonry Products



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Single Row Cup	5" / 125 mm	22.2 mm	1	25

PGCDR DOUBLE ROW CONCRETE GRINDING CUP | Product Code PGCDR125-PWR

- Double row for longer life and smoother finish
 - Perfect for flat grinding
 - For formwork cleaning
 - For removal of imperfections in concrete
 - For dry grinding
- Suitable base materials:*
- Cured Concrete
 - Clay Bricks
 - General Masonry Products



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Single Row Cup	5" / 125 mm	22.2 mm	1	25

PGCR RADIAL CONCRETE GRINDING CUP | Product Code PGCR125-PWR

- Perfect for removing glue / paint without clogging
 - For fast stripping of concrete
 - For removal of imperfections in concrete
 - For dry grinding
- Suitable base materials:*
- Cured Concrete
 - Clay Bricks
 - General Masonry Products



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Radial Cup	5" / 125 mm	22.2 mm	1	25

PGCT TURBO STYLE CONCRETE GRINDING CUP | Product Code PGCT125-PWR

- Double layer for better cooling
 - Perfect for shaping concrete / stone
 - For removal of imperfections in concrete
 - For dry grinding
- Suitable base materials:*
- Cured Concrete
 - Clay Bricks
 - Pavers
 - General Masonry Products



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Turbo Cup	5" / 125 mm	22.2 mm	1	25



CUTTING & GRINDING

PSEG NON-ABRASIVE SEGMENTED BLADE | Product Code PSEG125-PWR

- 10mm segment height • High concentration of diamond • Long life • Fast cutting
- Pressed fit bush to core • Cut out directional arrow • Wet / Dry use

Suitable base materials:

- Wall chasing • Clay Bricks • Bluestone • Lightweight / Cured / Reinforced Concrete
- Terracotta roof tiles • Slate • Hebel Block



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Segmented Blade	5" / 125 mm	22.2 mm	1	5

PASEG ABRASIVE SEGMENTED BLADE | Product Code PASEG125-PWR

- 10mm segment height • High concentration of diamond • Long life in abrasive material • Fast cutting
- Pressed fit bush to core • Cut out directional arrow • Wet / Dry use

Suitable base materials:

- Green Concrete • Concrete Block • Sandstone • Mortar Joints • Lightweight Concrete
- Compressed Sheet • Concrete Roof Tiles • Wall Chasing (Abrasive) • Hebel Block



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Abrasive Cup	5" / 125mm	22.2 mm	1	5

PCDEMO NON-ABRASIVE SEGMENTED DEMOLITION BLADE | Product Code PCDEMO350-PWR

- 12mm segment height • High concentration of diamond • Long life • Fast cutting
- Cut out directional arrow • Laser welded segments

Suitable base materials:

- Cured Concrete • Clay Bricks • Hebel Block



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Laser Welded	14" / 350 mm	20 / 25.4 mm	1	10

PADEMO ABRASIVE SEGMENTED DEMOLITION BLADE | Product Code PADEMO350-PWR

- High concentration of diamond • Long life • Fast cutting • Cut out directional arrow
- Dropped segment for undercut protection • Wet / Dry use • Laser welded

Suitable base materials:

- Green Concrete • Concrete Block • Sandstone • Asphalt • Mortar Joints



Description	Disc Diameter	Bore Size	Box Qty	Carton Qty
Laser Welded	14" / 350 mm	20 / 25.4 mm	1	10



TRADE ITEMS ORDERING - EXTERIOR

CHEMICAL ANCHORS - EXTERIOR



Chemical Injection - Anchoring

PURE150PRO-385-PWR	Adhesive Injection System Pure Epoxy 3/1 385ml Cartridge with 2 x Nozzles
PURE150PRO-585-PWR	Adhesive Injection System Pure Epoxy 3/1 585ml Cartridge with 2 x Nozzles
PURE110PRO-620-PWR	Adhesive Injection System Pure Epoxy 1/1 620ml Cartridge with 2 x Nozzles
AC100PRO-PWR	Adhesive Injection System Vinylester 420ml Cartridge with 2 x Nozzles
PV45PRO-PWR	Adhesive Injection System Polyester 410ml Cartridge 2 x Nozzles
AC-100E-PWR	Adhesive Injection System Acrylic 300ml Cartridge with 2 x Nozzles (suits standard dispensing gun)



Chemical Injection - Cartridge Delivery Systems

CG380KF2-PWR	Adhesive Dispensing Gun for KF2, AC100PRO and PV45PRO
CG585-PWR	Adhesive Dispensing Gun for PURE150PRO 385ml and 585ml Cartridges
CG620-PWR	Adhesive Dispensing Gun for PURE110PRO 620ml Cartridge
CG150SF-PWR	Adhesive Dispensing Gun for AC100e and 300ml Cartridge
CGPRO-4-PWR	Adhesive Dispensing Gun 4 In 1 (Suits PURE150PRO, AC100PRO, PV45PRO, AC100e Adhesive Systems)
CGPRO-PWR	Adhesive Dispensing Gun 4 In 1 (Suits PURE150PRO, AC100PRO, PV45PRO, AC100e Adhesive Systems) Metal Housing
CGB-420-PWR	Adhesive Dispensing Gun Battery Operated Tool For AC100PRO and PV45PRO
CGB-585-PWR	Adhesive Dispensing Gun Battery Operated Tool For PURE150PRO 385 and 585ml Cartridges
CGB-10.8V-PWR	Adhesive Dispensing Gun Replacement Battery Li-Ion 10.8Vlt 1.5Ah
CGPN385-PWR	Adhesive Dispensing Gun Pneumatic Tool For PURE150PRO 385ml Cartridge
CGPN585-PWR	Adhesive Dispensing Gun Pneumatic Tool For PURE150PRO 585ml Cartridge

SC-PRO Capsule Adhesive Anchoring

SC-PROM8-PWR	Glass Capsule Adhesive Anchor M8	
SC-PROM10-PWR	Glass Capsule Adhesive Anchor M10	
SC-PROM12-PWR	Glass Capsule Adhesive Anchor M12	
SC-PROM16-PWR	Glass Capsule Adhesive Anchor M16	
SC-PROM20-PWR	Glass Capsule Adhesive Anchor M20	
SC-PROM24-PWR	Glass Capsule Adhesive Anchor M24	

Chisel Point Anchor Studs

5.8 Grade Zinc Yellow		5.8 Grade Galvanised		316 Stainless Steel	
STM8110-PWR	M8 x 110mm	STM8110G-PWR	M8 x 110mm	STM8110SS-PWR	M8 x 110mm
STM10130-PWR	M10 x 130mm	STM10130G-PWR	M10 x 130mm	STM10130SS-PWR	M10 x 130mm
STM12160-PWR	M12 x 160mm	STM12160G-PWR	M12 x 160mm	STM12160SS-PWR	M12 x 160mm
STM16190-PWR	M16 x 190mm	STM16190G-PWR	M16 x 190mm	STM16190SS-PWR	M16 x 190mm
STM20260-PWR	M20 x 260mm	STM20260G-PWR	M20 x 260mm	STM20260SS-PWR	M20 x 260mm
STM24300-PWR	M24 x 300mm	STM24300G-PWR	M24 x 300mm	STM24300SS-PWR	M24 x 300mm



Flat Cut Anchor Studs

5.8 Grade Zinc Yellow		5.8 Grade Galvanised	
FCS8110-PWR	M8 x 110mm	FCSG8110-PWR	M8 x 110mm
FCS10130-PWR	M10 x 130mm	FCSG10130-PWR	M10 x 130mm
FCS12160-PWR	M12 x 160mm	FCSG12160-PWR	M12 x 160mm
FCS16190-PWR	M16 x 190mm	FCSG16190-PWR	M16 x 190mm
FCS20260-PWR	M20 x 260mm	FCSG20260-PWR	M20 x 260mm
FCS24300-PWR	M24 x 300mm	FCSG24300-PWR	M24 x 300mm




Detailed performance data is available for all DEWALT and POWERS products

Internally Threaded Sleeves

Zinc			316 Stainless Steel		
ITS-M8-PWR	Internal Threaded Sleeve M8 x 80mm		ITS-SS-M8-PWR	Internal Threaded Sleeve M8 x 80mm	
ITS-M10-PWR	Internal Threaded Sleeve M10 x 90mm		ITS-SS-M10-PWR	Internal Threaded Sleeve M10 x 90mm	
ITS-M12-PWR	Internal Threaded Sleeve M12 x 110mm		ITS-SS-M12-PWR	Internal Threaded Sleeve M12 x 110mm	
ITS-M16-PWR	Internal Threaded Sleeve M16 x 150mm		ITS-SS-M16-PWR	Internal Threaded Sleeve M16 x 150mm	
ITS-M20-PWR	Internal Threaded Sleeve M20 x 200mm		ITS-SS-M20-PWR	Internal Threaded Sleeve M20 x 200mm	

Flat Cut Anchor Studs - Galvanised - Hollow Block Applications

STMRE16125G-PWR	Flat Cut Stud for Hollow Core M16 x 125mm 5.8 Grade Galvanised (Suits PSM1685 SLEEVE)	
-----------------	---	---

Hollow Block Applications - Sleeves / Accessories

Adhesive Plastic Sleeves		Adhesive Mesh Sleeves	
PSM1012130-PWR	Sieve for M10 - M12 Studs (15mm x 130mm)	MS121000-PWR	Sieve 11mm x 1000mm (for M8 Studs)
PSM101285-PWR	Sieve for M10 - M12 Studs (15mm x 85mm)	MS161000-PWR	Sieve 15mm x 1000mm (for M10 and M12 Studs)
PSM1685-PWR	Sieve for M16 Studs (20 x 85mm)	MS201000-PWR	Sieve 21mm x 1000mm (for M16 Studs)
PSM850-PWR	Sieve for M8 Studs (12mm x 50mm)		

Retaining Caps

RC8-PWR	Retaining Caps M8		
RC10-PWR	Retaining Caps M10		
RC12-PWR	Retaining Caps M12		
RC16-PWR	Retaining Caps M16		
RC20-PWR	Retaining Caps M20		

MECHANICAL ANCHORS - EXTERIOR


Blue-Tip Screwbolt - Hex Head - Zinc Yellow (See POWERS +PLUS brochure for extra range)

BT550-PWR	5mm x 50mm	BT875-PWR	8mm x 75mm	BT12100-PWR	12mm x 100mm
BT6530-PWR	6.5mm x 30mm	BT8100-PWR	8mm x 100mm	BT12150-PWR	12mm x 150mm
BT6550-PWR	6.5mm x 50mm	BT1060-PWR	10mm x 60mm	BT16100-PWR	16mm x 100mm
BT6575-PWR	6.5mm x 75mm	BT1075-PWR	10mm x 75mm	BT16150-PWR	16mm x 150mm
BT65100-PWR	6.5mm x 100mm	BT10100-PWR	10mm x 100mm		
BT850-PWR	8mm x 50mm	BT10120-PWR	10mm x 120mm		
BT860-PWR	8mm x 60mm	BT1275-PWR	12mm x 75mm		

Blue-Tip Screwbolt - Hex Head - Galvanised (See POWERS +PLUS brochure for extra range)

BTG550-PWR	5mm x 50mm	BTG875-PWR	8mm x 75mm	BTG12100-PWR	12mm x 100mm
BTG6530-PWR	6.5mm x 30mm	BTG8100-PWR	8mm x 100mm	BTG12150-PWR	12mm x 150mm
BTG6550-PWR	6.5mm x 50mm	BTG1060-PWR	10mm x 60mm	BTG16100-PWR	16mm x 100mm
BTG6575-PWR	6.5mm x 75mm	BTG1075-PWR	10mm x 75mm	BTG16150-PWR	16mm x 150mm
BTG65100-PWR	6.5mm x 100mm	BTG10100-PWR	10mm x 100mm		
BTG850-PWR	8mm x 50mm	BTG10120-PWR	10mm x 120mm		
BTG860-PWR	8mm x 60mm	BTG1275-PWR	12mm x 75mm		


PTB-ETA1-PRO ThroughBolt - Hex Head - Zinc Clear

69294-PWR	M6 x 85mm PRO	69358-PWR	M12 x 90mm ETA1-PRO	69392-PWR	M16 x 150mm ETA1-PRO Seismic
69308-PWR	M8 x 85mm ETA1-PRO Seismic	69360-PWR	M12 x 100mm ETA1-PRO	69398-PWR	M16 x 210mm ETA1-PRO Seismic
69314-PWR	M8 x 105mm ETA1-PRO Seismic	69366-PWR	M12 x 135mm ETA1-PRO Seismic	69411-PWR	M20 x 160mm ETA1-PRO Seismic
69318-PWR	M8 x 130mm ETA1-PRO Seismic	69372-PWR	M12 x 185mm ETA1-PRO Seismic	69415-PWR	M20 x 200mm ETA1-PRO Seismic
69334-PWR	M10 x 90mm ETA1-PRO Seismic	69388-PWR	M16 x 115mm ETA1-PRO		
69340-PWR	M10 x 120mm ETA1-PRO Seismic	69390-PWR	M16 x 125mm ETA1-PRO Seismic		

PTB-ETA1-PRO ThroughBolt - Hex Head - Galvanised

PTBG08080-PWR	M8 x 80mm	PTBG12080-PWR	M12 x 80mm	PTBG16190-PWR	M16 x 190mm
PTBG08100-PWR	M8 x 100mm	PTBG12100-PWR	M12 x 100mm	PTBG20125-PWR	M20 x 125mm
PTBG08120-PWR	M8 x 120mm	PTBG12140-PWR	M12 x 140mm	PTBG20160-PWR	M20 x 160mm
PTBG10065-PWR	M10 x 65mm	PTBG16105-PWR	M16 x 105mm	PTBG20200-PWR	M20 x 200mm
PTBG10090-PWR	M10 x 90mm	PTBG16125-PWR	M16 x 125mm		
PTBG10120-PWR	M10 x 120mm	PTBG16140-PWR	M16 x 140mm		

PBI - POWERS Brace-It Anchor

PBI20-20/115LH-PWR	Bracing Anchor PBI 20mm / M14 x 115mm (30mm Large Head)	
--------------------	---	---

Go to www.dewalt.com.au or www.powers-guide.com

MECHANICAL ANCHORS - EXTERIOR (Continued)

MUNGO MB-S Nylon Framing Anchors

Hex Head		Hex Head - 316 Stainless Steel		Metal	
MBRSH1060-PWR	10mm x 60mm	MBSHSS10080-PWR	10mm x 80mm	MMS1090-PWR	10mm x 90mm
MBSH10080-PWR	10mm x 80mm	MBSHSS10100-PWR	10mm x 100mm	MMS10110-PWR	10mm x 110mm
MBSH10100-PWR	10mm x 100mm	Pozi 3 CSK		MMS10130-PWR	10mm x 130mm
MBSH10120-PWR	10mm x 120mm			MBRSP1060-PWR	10mm x 60mm
MBSH10140-PWR	10mm x 140mm	MBSP1080-PWR	10mm x 80mm	MQLK-STB1080-PWR	10mm x 80mm
MBSH10160-PWR	10mm x 160mm	MBSP10100-PWR	10mm x 100mm	MQLK-STB10100-PWR	10mm x 100mm
MBSH10200-PWR	10mm x 200mm	MBSP10120-PWR	10mm x 120mm	MQLK-STB10120-PWR	10mm x 120mm
MBSH10240-PWR	10mm x 240mm	MBSP10140-PWR	10mm x 140mm		
MBSH10280-PWR	10mm x 280mm	MBSP10160-PWR	10mm x 160mm		
MBSH10300-PWR	10mm x 300mm	MBSP10200-PWR	10mm x 200mm		
Hex Head - Galvanised		Torx T40			
MBSHG10060-PWR	10mm x 60mm	MBST1080-PWR	10mm x 80mm		
MBSHG10080-PWR	10mm x 80mm	MBST10100-PWR	10mm x 100mm		
MBSHG10100-PWR	10mm x 100mm	MBST10120-PWR	10mm x 120mm		
MBSHG10120-PWR	10mm x 120mm	MBST10140-PWR	10mm x 140mm		
MBSHG10140-PWR	10mm x 140mm	MBST10160-PWR	10mm x 160mm		
MBSHG10160-PWR	10mm x 160mm	T40-PWR	T40 x 50mm Torx Drive		

FORCED ENTRY - EXTERIOR

Powder Actuated Tools & Accessories

P3X-PWR	P3X High Powered .25 Caliber Powder Actuated Tool Kit	
P3X-IFKIT-PWR	P3X Insulation Fastener Guide Kit (Guide, Piston & O-Ring)	
P3X-IFPISTON-PWR	P3X Insulation Fastener Guide Piston	
PA3500EX-PWR	PA3500EX .27 Cal Semi-Automatic Powder Actuated Tool Kit	
PA3500EXIFKIT-PWR	PA3500EX Insulation Fastener Kit (B/Plate, Guide & Piston)	
PA3500EXIFGDE-PWR	PA3500EX Insulation Fastener Piston-Guide Only	
PA3500EXIFPIST-PWR	PA3500EX Insulation Fastener Guide Piston	

8mm Head Drive Pin (8mm Head) - Single Shot - Suits POWERS, HILTI & RAMSET Tools

50016-PWR	3.7mm x 16mm Knurled	50036-PWR	3.7mm x 45mm	50046-PWR	3.7mm x 70mm
50022-PWR	3.7mm x 19mm	50038-PWR	3.7mm x 50mm	50048-PWR	3.7mm x 75mm
50026-PWR	3.7mm x 25mm	50040-PWR	3.7mm x 57mm	50050-PWR	3.7mm x 97mm
50032-PWR	3.7mm x 32mm	50042-PWR	3.7mm x 60mm		
50034-PWR	3.7mm x 38mm	50044-PWR	3.7mm x 65mm		

8mm Ballistic Point Step Shank Drive Pin (8mm Head) - Single Shot - Suits POWERS, HILTI & RAMSET Tools

SC50038-PWR	4.0mm x 50mm	SC50048-PWR	4.0mm x 60mm		
SC50042-PWR	4.0mm x 60mm				

8mm Head Collated Drive Pin (8.6mm Head) - Single Shot - Suits POWERS P3X Tool

22350-PWR	3.7mm x 15mm	22370-PWR	3.7mm x 35mm	22390-PWR	P3X Rubber Spring
22355-PWR	3.7mm x 20mm	22375-PWR	3.7mm x 40mm		
22360-PWR	3.7mm x 25mm	22380-PWR	3.7mm x 50mm		
22365-PWR	3.7mm x 30mm	22385-PWR	3.7mm x 60mm		

8mm Head Collated Drive Pin (8mm Head) - Suits POWERS, HILTI & RAMSET Tools

50240-PWR	3.8mm x 16mm	50250-PWR	3.8mm x 32mm	50262-PWR	3.8mm x 62mm
50242-PWR	3.8mm x 19mm	50252-PWR	3.8mm x 37mm	50264-PWR	3.8mm x 72mm
50246-PWR	3.8mm x 22mm	50254-PWR	3.8mm x 42mm		
50248-PWR	3.8mm x 27mm	50258-PWR	3.8mm x 52mm		

.25 Caliber Disk Charges / Cartridges

50536-PWR	Disk Charge 10 x .25 Caliber (YELLOW)	
50558-PWR	Disk Charge 10 x .25 Caliber (RED)	

.27 Caliber Strip Charges / Cartridges

50622-PWR	Strip Charge 10 x .27 Caliber (GREEN)	
50626-PWR	Strip Charge 10 x .27 Caliber (YELLOW)	
50630-PWR	Strip Charge 10 x .27 Caliber (RED)	

Detailed performance data is available for all DEWALT and POWERS products

